


ADK-SI4M18XN NETWORK PTZ DOME CAMERA 4M 18X

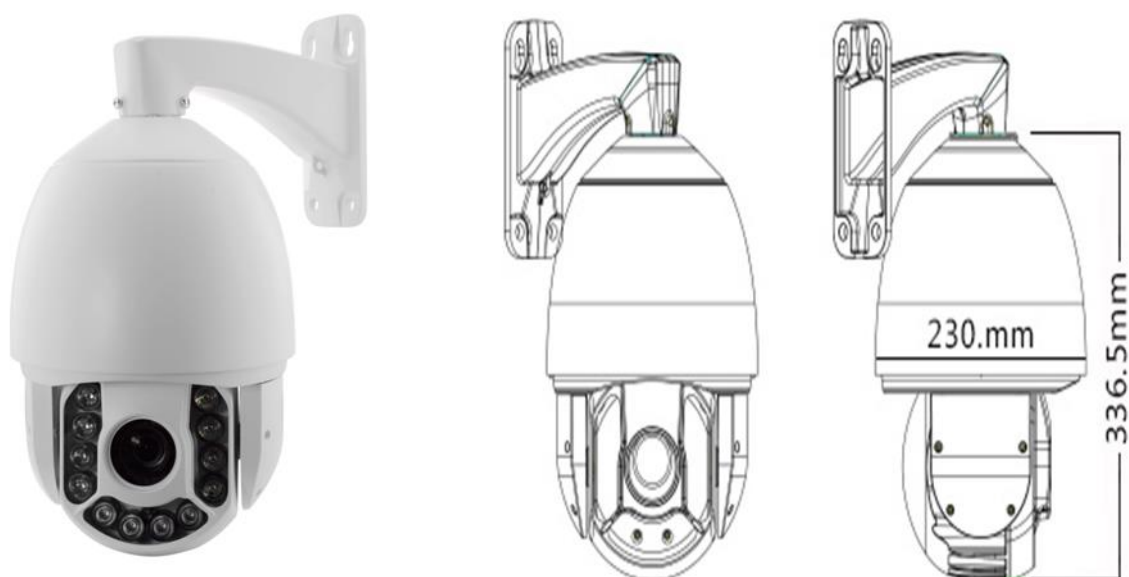

Pan & Tilt	
Manual speed	Pan (0.1°~200°/s)
	Tilt (0.1°~180°/s)
Rotation	Pan continuously 360°, tilt 0~90° with auto-flip
Preset	128 preset, title can be edited
Auto-flip	Tilt down 90°, with auto-flip 180°
Scan	355°programmable, 4 scan
Pattern	4 patterns, and each record time is not less than 180s
Tour	4 tour, and speed & park time of presets can be set.
Idle run	tour/preset/pattern/scan can be set
Power up run	tour/preset/pattern/scan can be set
Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples

CAM SPEC	
sensor	HIS3516D+1/3" 4.0M Pixel OV4689 CMOS
Effective Pixels	2304x1296@30fps 2592x1520@22fps

Image Output	Main Stream:1920×1080、1280×960、1280×720、720×576、640×480
	Sub Stream: 640×480、480×360、352×288、320×240、176×144
	MJPEG: 1080P、1280×720、off
Signal System	PAL/NTSC
Frame	25/30 fps
Image Compression	H.265 /H.264 / MJPEG
OPTICS	Optical x18, f = 4.7 mm ~ 96 mm
Angle	Appr. 72°(Wide) to 3.8°(Tele)
Auto Focus	Auto / Semi-automatic / Manual
Zoom Speed	Approx.4.0s(Optical Wide-Tele)
Min. Illumination	Color : 0.05 lux , BW : 0.01lux
Shutter Time	1 /2~1/20,000s
SNR	≥50dB (AGC OFF)
White Balance	Auto
AGC	Auto/Manua
BLC	ON/OFF
WDR	D-WDR ≥73.7dB
DNR	Auto /DNR/3DNR
HLC	Off / On
Max Gain	Auto
IRIS	Auto
FLIP	Vertical , Horizontal ,Vertical-Horizontal,OFF Selectable
Privacy	Support
Motion Detection	Support

IR	
IR irradiation distance	150m
IR irradiation angle	Adjustable by zoom
ICR	Manual/Auto

Network	
Ethernet	10Base -T, /100Base-TX, RJ45 Connector
Protocols	TCP/IP, HTTP, NTP, IGMP, DHCP, UDP, SMTP, RTP, RTSP, ARP, DDNS, DNS, P2P
Security Measures	User authentication (ID and PW), Host authentication (MAC address) IP address filtering
Onvif	Onvif 2.4 Ver.
User Sessions	Main Stream 3 Sub Stream 6
Output bit rate	CBR / VBR (32Kbps~10Mbps)

Characters overlap	Channel Names&Date and Time (Location is adjustable)
The front store	T-flash card (adapting)
Power consumption	9W/35W(IR_LED ON)
Power supply	DC 24V 2A
Temperature	-20℃~+60℃
Installation	Wall installation, ceiling installation, ceiling type installation
Net weight	6.5kg
Size	Product size 336.5×230mm, Packing size Packing size 235*235*460mm
Protection Level:	IP66 standard (outdoor dome)
	TVS lightning protection, surge protection and voltage transient protection

WWW.ADKSECURITY.NET