

# ADK-DI5M2.8A

دوربین دام 5 مگا پیکسل اسمارت

## H.265 5MP Smart IR Dome IP Camera



Target Count



Object Left/Lost



Area Detection




Line Crossing

### FEATURES

- Support intelligent analysis: target count, item left/lost, area detection, line crossing;
- Adopt Linux embedded operating system, low bit rate, low power consumption, stable and reliable;
- H.265 video coding, high compression ratio, good picture quality; support dynamic rate control;
- Support Onvif protocol, proprietary protocol Slink secure connection and Digest security authentication;
- Short video delay and the video high-speed motion picture is clear and smooth;
- High-performance 3D digital noise reduction and edge enhancement;
- 10/100M adaptive, support network protocols such as HTTP/RTSP/DHCP;
- ICR infrared filter type automatic switching to achieve true day and night monitoring;
- Support backlight compensation and automatic electronic shutter function to adapt to different monitoring environments;
- Support AEeye2.0 P2P for mobile phone or computer monitoring;
- Support OSD display.

[www.kavoshphone.com](http://www.kavoshphone.com)

021-91321813 09121988790

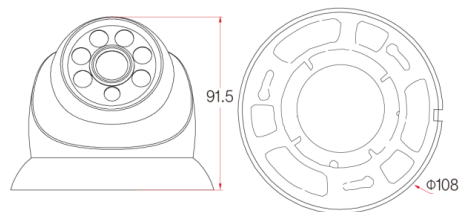

<b>MODEL</b>	ADK-DI5M2.8A
<b>BASIC PARAMETER</b>	
Image Sensor	1/2.7" SC5235
Chipset	MSC316DM
Effective Pixels	5MP
Min. Illumination	Color : 0.1Lux@F1.2 ; B&W : 0Lux@F1.2 ( IR on )
IR Distance	20-30M ( 6 x IR III Array IR Lamps )
Lens	M12 2.8mm fixed lens
Noise Reduction	3D digital noise reduction
WDR	Support DWDR ( D-WDR ) , > 80db
BLC	Support
S/N Ratio	≥50db(AGC closed)
Image Settings	Support for brightness, contrast, saturation, white balance, AWB (automatic white balance), AGC (automatic gain), AE (automatic exposure); support privacy area; normal / 90 ° / 270 ° image rotation; Automatic, manual color to black and other switches.
<b>AUDIO / VIDEO ENCODING</b>	
Encoding Format	H.265 Main Profile Encoding ; H.264 Baseline/ Main Profile/High Profile Encoding
Image Resolution	Main stream 2592×1944, 15 fps 2592×1520, 20 fps 2048×1536, 25 fps
	Sub stream 704×576, 15-25 fps 640×480, 15-25 fps
Video Bit Rate	32Kbps-16Mbps continuously adjustable, support CBR / VBR
Overlay	Channel name, date time, steam info; position is adjustable.
<b>DATA TRANSMISSION &amp; STORAGE</b>	
Data Storage	Video, Image
Storage Mechanism	Manual, automatic (cycle, timing, alarm switch, motion detection)
Alarm Data Transmission	FTP, E-mail, Browser, Management software
Protocol	TCP/IP,UDP,HTTP,DHCP,RTSP,DDNS,NTP,PPPOE,UPNP,SMTP,ONVIF
Access Standard	ONVIF Protocol; SDK
Smart Functions	<b>Target count, item left/lost, area detection, line crossing;</b>
Client Browse	Support IE6.0 and above browser, support 8 users concurrent access (MAX)
P2P Remote	AEeye2.0 supports iPhone, iPad, Android system smartphone Support Windows 7 and above computer client, Apple MAC computer client
Other	Support corridor mode to increase monitoring area in vertical and long environment
<b>PORT</b>	
Network	RJ45, 10M/100M network adaptive
<b>GENERAL</b>	
Operation T/H	-20°C ~ 55°C/0%-90%
Waterproof	IP66
Power Supply	DC12V / EXTERNAL POE
Power Consumption	<10W (MAX)
Dimension (mm)	Camera: 91.5(H)*Φ108(D)mm ; With Package: 110mm(L)*110mm(W)*92mm(H)
Weight/PCS (g)	N.W.: 158g Packing: 215g
Outside Carton	36 pcs/carton. Dimension : 475mm(L)* 355mm(W)* 305mm(H) Weight : 11kg